


S2000シャシダイデータ

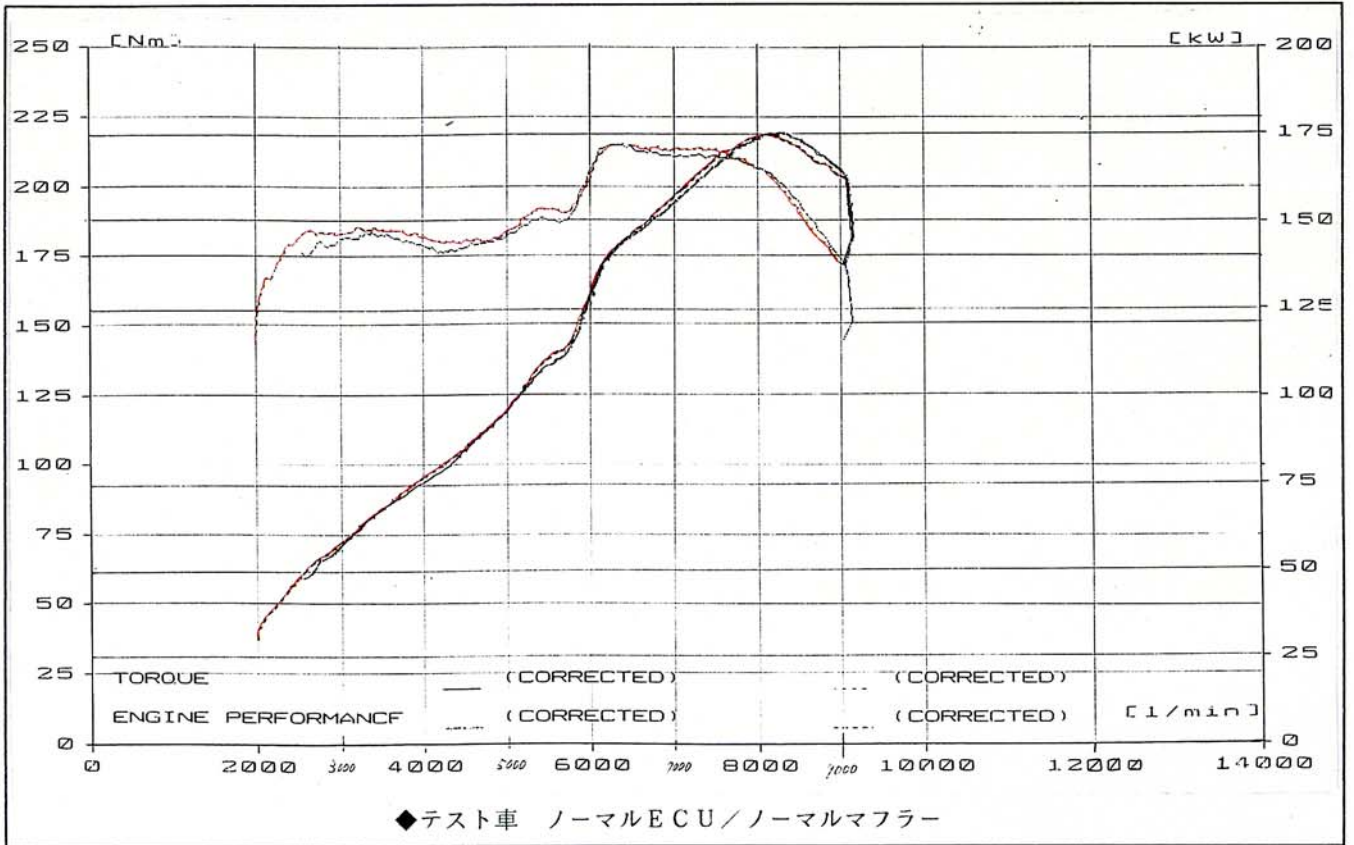

FLA - 203

SOFTWARE VERSION 3.5 G

28.02.2000
g958

TORQUE

#: 3

ノーマルEXマニ 238.7PS

$T_{max} = 215.1 \text{ Nm}$ at $n = 6340 \text{ 1/min}$ $v = 157.5 \text{ km/h}$ 21.08Kg
 $P_{rated} = 190 \text{ kW}$ $n_{specs} = 10000 \text{ 1/min}$ $v_{max} = 230 \text{ km/h}$
 $P_{max} = 175.5 \text{ kW}$ at $v = 203.0 \text{ km/h}$ $n = 8100 \text{ 1/min}$
 $P_{tol} = -7.7 \%$ $P_{wheel} = 151.3 \text{ kW}$ $P_{loss} = 26.6 \text{ kW}$
 $Temp. = 15 \text{ C}$ $Press. = 1018 \text{ hPa}$ $k = 0.987 \text{ (DIN)}$
 PASSENGER CAR GEAR REAR WHEEL DRIVE
 4-STROKE SECONDARY

TORQUE

#: 4

マキシムEXマニ 237.9PS

$T_{max} = 215.2 \text{ Nm}$ at $n = 6430 \text{ 1/min}$ $v = 158.5 \text{ km/h}$ 21.09Kg
 $P_{rated} = 190 \text{ kW}$ $n_{specs} = 10000 \text{ 1/min}$ $v_{max} = 230 \text{ km/h}$
 $P_{max} = 174.9 \text{ kW}$ at $v = 203.0 \text{ km/h}$ $n = 8230 \text{ 1/min}$
 $P_{tol} = -8.0 \%$ $P_{wheel} = 151.7 \text{ kW}$ $P_{loss} = 26.5 \text{ kW}$
 $Temp. = 15 \text{ C}$ $Press. = 1023 \text{ hPa}$ $k = 0.982 \text{ (DIN)}$
 PASSENGER CAR GEAR REAR WHEEL DRIVE
 4-STROKE SECONDARY